


HDMI TYPE-A RECEPTACLES - MID-MOUNT PCB

Features:


- Up to 18 Gbps communication speed
- Industry standard plug and play technology - 'Hot Pluggable'
- Compatible with synchronous and asynchronous data transfer
- Data and power combined in one small package
- RoHS compliant

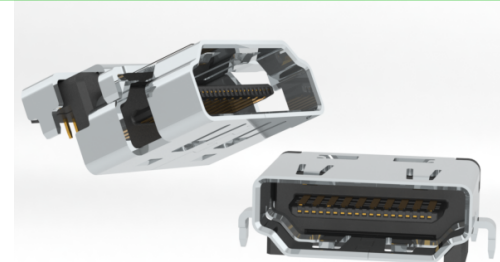

Specifications:

| | |
|--------------------|---|
| Insulator Material | Thermoplastic UL-94V-0 |
| Contact Material | Copper alloy |
| Contact Plating | Nickel under plating with Gold plating on contact areas |
| Shell Material | Copper alloy with Nickel plating |
| Insertion Force | 44N maximum |
| Withdrawal Force | 10N minimum to 39N maximum |

EXAMPLE PART NUMBER: 694C519-653-011

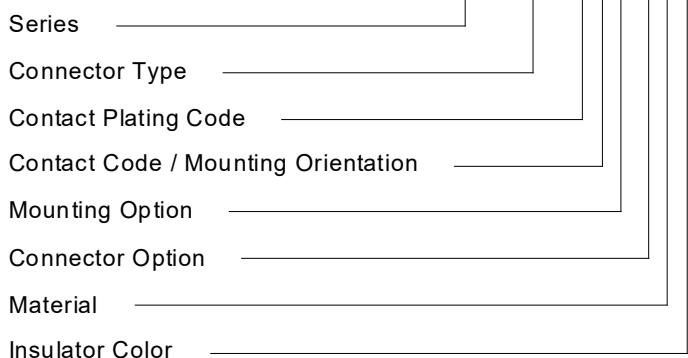

Series:

694C Receptacle

Connector Type:

119 HDMI Type-A

519 HDMI Type-A Reverse Mount - (Black Only)

Contact Plating:

1 2µ" ~ 5µ" Gold

2 Gold Flash

3 5µ" ~ 10µ" Gold

5 15µ" Gold

6 30µ" Gold

Contact Code / Mounting Orientation:

5 Mid-Mount PCB

Mounting Option:

3 4 Through Hole Grounding Tabs

Connector Option:

0 Standard Body

Material:

1 LCP

Insulator Color:

1 Black

Ordering Code Notes:

Not all part numbers deriving from this ordering guide will be available.

Some may be available upon request. Please first consult the website, if the connector is not readily available then please contact EDAC's customer service for further inquiries.